




Decoral®  
System  
[www.decoral-system.com](http://www.decoral-system.com)


EFFECTO CEMENTO




Powder Coating: 9C-016-A001 + Heat Transfer Film: 5026/04

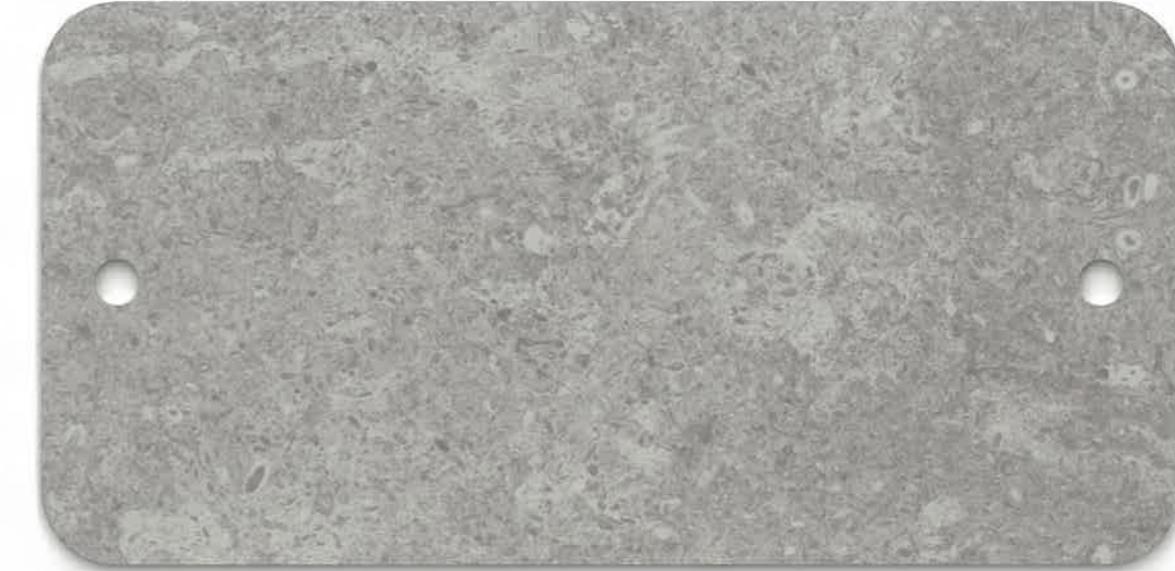

Powder Coating: MirrorL-183S + Heat Transfer Film: 5026/04

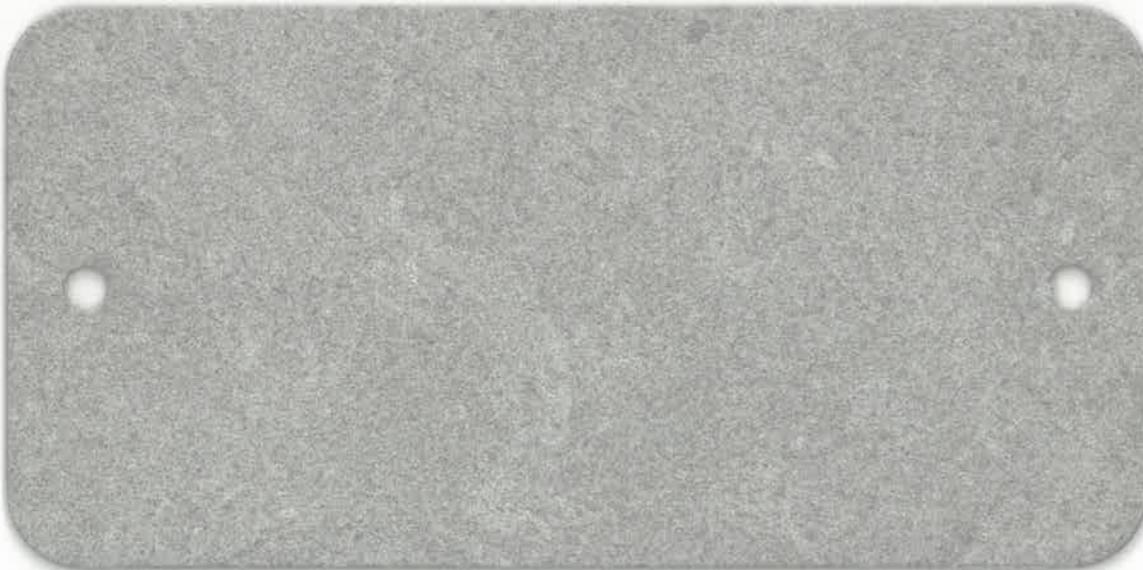

Powder Coating: Mirror-113S + Heat Transfer Film: 5026/04

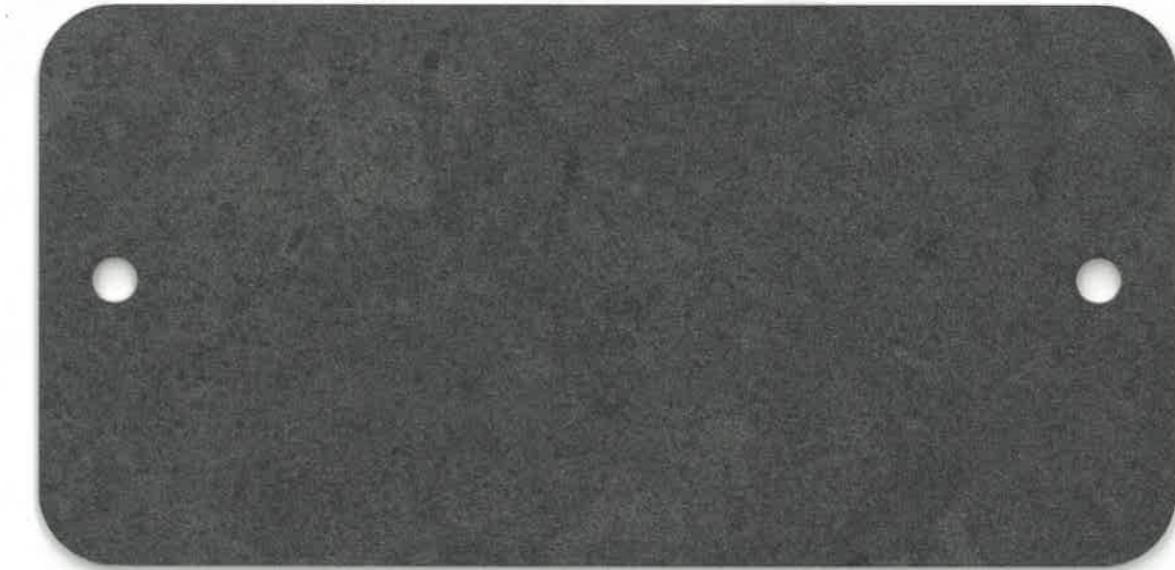

Powder Coating: Mirror-107S + Heat Transfer Film: 5026/02

# EFFETTO CEMENTO

**Test Report:**  
Florida Natural  
Exposure

 **Decoral LAB**  
Research and Development

 Florida Test     Total duration:  
12 months

**45**



**Test Report:**  
Florida Natural  
Exposure

 **Decoral LAB**  
Research and Development

 Florida Test     Total duration:  
12 months

**66**




**Test Report:**  
Florida Natural  
Exposure

 **Decoral LAB**  
Research and Development

 Florida Test     Total duration:  
12 months

**178**

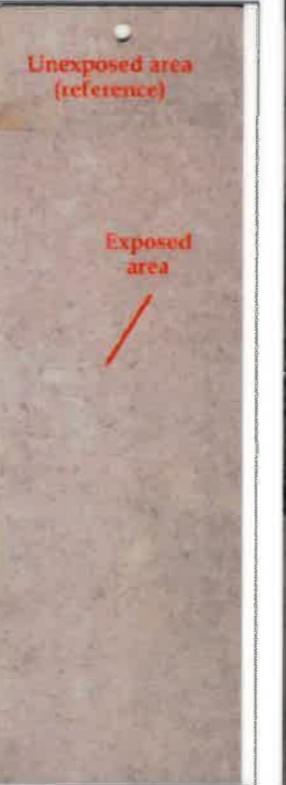

**Test Report:**  
Florida Natural  
Exposure

 **Decoral LAB**  
Research and Development

 Florida Test     Total duration:  
12 months

**182**



Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.

**QUALICOAT REQUIREMENTS**  
The residual gloss shall be at least 50% of the original gloss.  
The ΔE values shall not exceed the maximum values prescribed in the annexed table (see Appendix A7 of Qualicoat Specifications).

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.

**QUALIDECO REQUIREMENTS**  
The residual gloss must be at least 50% of the original gloss.  
The final evaluation will be based on visual inspection with the naked eye, with a maximum value of 4 on the grey scale (ISO 105-A02).

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.

**QUALIDECO REQUIREMENTS**  
The residual gloss must be at least 50% of the original gloss.  
The final evaluation will be based on visual inspection with the naked eye, with a maximum value of 4 on the grey scale (ISO 105-A02).

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.

**QUALIDECO REQUIREMENTS**  
The residual gloss must be at least 50% of the original gloss.  
The final evaluation will be based on visual inspection with the naked eye, with a maximum value of 4 on the grey scale (ISO 105-A02).

Mod\_771\_02\_rev02 Laboratory Decoral System Date: 25/07/2016 IQ Report: T7-NC-45-20-8

Mod\_771\_02\_rev02 Laboratory Decoral System Date: 10/05/2015 IQ Report: T7-NC-65-20-5

Mod\_771\_02\_rev02 Laboratory Decoral System Date: 10/17/2014 IQ Report: T7-NC-179-20-4

Mod\_771\_02\_rev02 Laboratory Decoral System Date: 21/11/2014 IQ Report: T7-NC-182-20-4