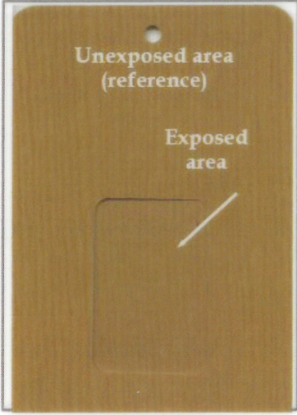
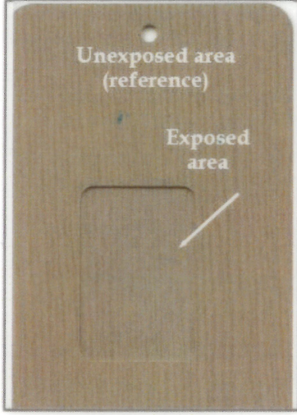
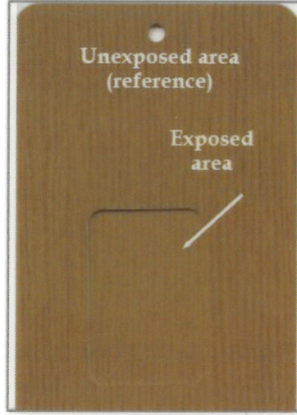
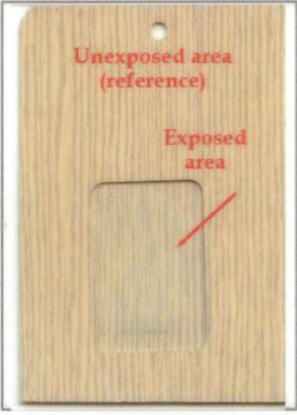



Light Wengé


Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		17	
Laboratory Test	No. 639	Device: Sol 3000e	Total duration: 1400h		
					
LAB. ID NUMBER: 53562 POWDER COATING: DS 741 HEAT TRANSFER FILM: 2516/10 Colour Variation (ΔE): 0,31 residual gloss: 99%					
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1400 hours.				Technical Opinion: Suitable for OUTDOOR USE	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03 Laboratory Decoral System Date: 20/02/2023 ID Report: TR-IA-17-2023					

Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		05	
Laboratory Test	No. 639	Device: Sol 3000e	Total duration: 1400h		
					
LAB. ID NUMBER: 53550 POWDER COATING: 8G-148-A009 HEAT TRANSFER FILM: 2516/10 Colour Variation (ΔE): 0,75 residual gloss: 99%					
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1400 hours.				Technical Opinion: Suitable for OUTDOOR USE	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03 Laboratory Decoral System Date: 20/02/2023 ID Report: TR-IA-05-2023					

Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		09	
Laboratory Test	No. 639	Device: Sol 3000e	Total duration: 1400h		
					
LAB. ID NUMBER: 53554 POWDER COATING: DS 733 HEAT TRANSFER FILM: 2516/10 Colour Variation (ΔE): 0,76 residual gloss: 79%					
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1400 hours.				Technical Opinion: Suitable for OUTDOOR USE	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03 Laboratory Decoral System Date: 20/02/2023 ID Report: TR-IA-09-2023					

Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		08	
Laboratory Test	No. 639	Device: Sol 3000e	Total duration: 1400h		
					
LAB. ID NUMBER: 53563 POWDER COATING: DS-0752S HEAT TRANSFER FILM: 2516/10 Colour Variation (ΔE): 0,61 residual gloss: 94%					
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1400 hours.				Technical Opinion: Suitable for OUTDOOR USE	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03 Laboratory Decoral System Date: 20/02/2023 ID Report: TR-IA-08-2023					

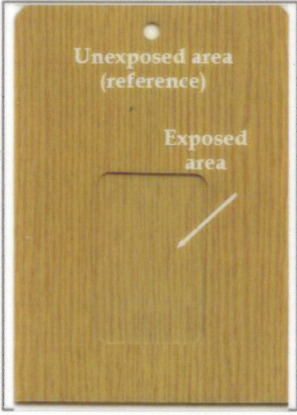Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		12	
Laboratory Test	No. 639	Device: Sol 3000e	Total duration: 1400h		
					
LAB. ID NUMBER: 53557 POWDER COATING: DS 716 HEAT TRANSFER FILM: 2516/10 Colour Variation (ΔE): 0,84 residual gloss: 84%					
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1400 hours.				Technical Opinion: Suitable for OUTDOOR USE	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03 Laboratory Decoral System Date: 20/02/2023 ID Report: TR-IA-12-2023					

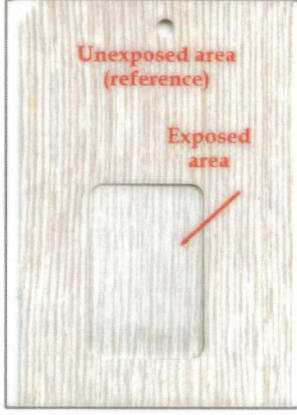Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		06	
Laboratory Test	No. 639	Device: Sol 3000e	Total duration: 1400h		
					
LAB. ID NUMBER: 53551 POWDER COATING: DS 704M HEAT TRANSFER FILM: 2516/10 Colour Variation (ΔE): 1,49 residual gloss: 89%					
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1400 hours.				Technical Opinion: Suitable for OUTDOOR USE	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03 Laboratory Decoral System Date: 20/02/2023 ID Report: TR-IA-06-2023					

Suitability for outdoor use of different combinations between polyurethane Decorat System® Powder coatings and heat transfer film Decorat System® must be assessed on www.decorat-system.com. (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

Light Wengé



Powder Coating: DS 733 + Heat Transfer Film: 2516/10




Powder Coating: DS 704M + Heat Transfer Film: 2516/10




Powder Coating: DS-0752S + Heat Transfer Film: 2516/10



Powder Coating: 8G-148-A009 + Heat Transfer Film: 2516/10

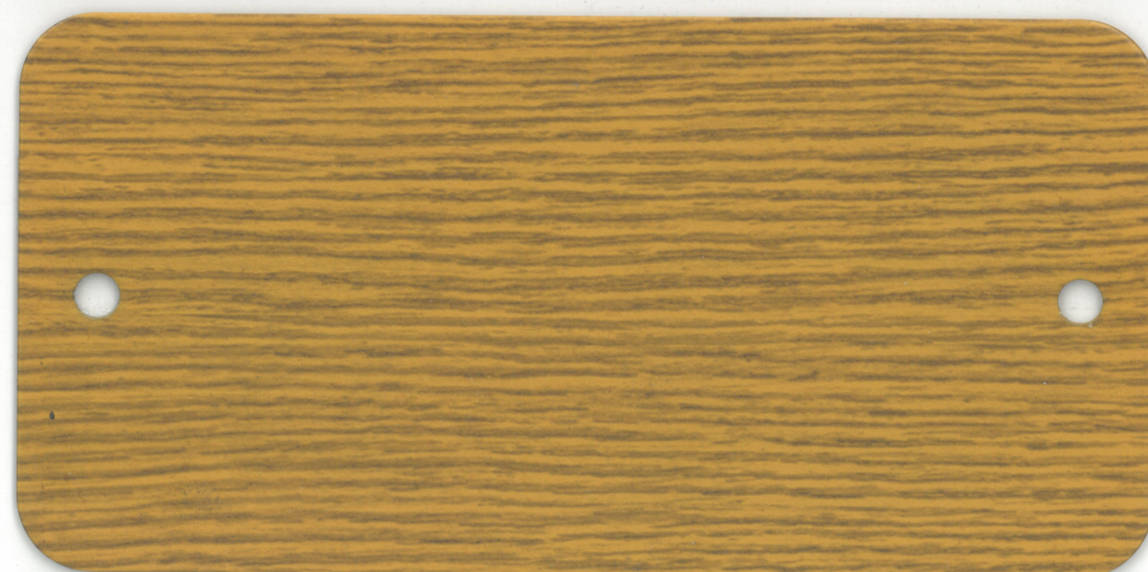

Powder Coating: DS 716 + Heat Transfer Film: 2516/10

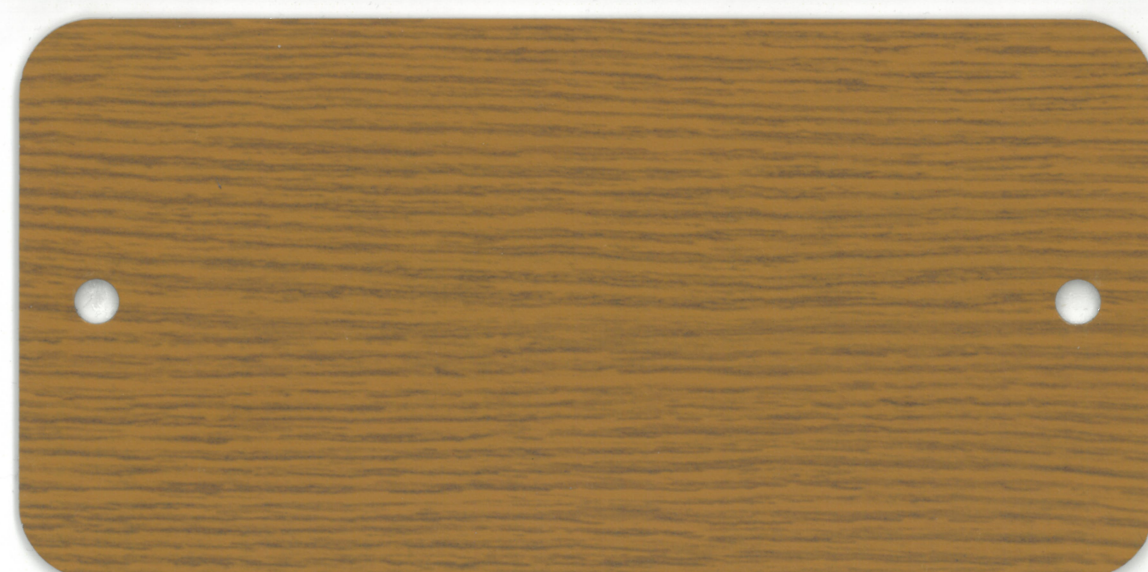

Powder Coating: DS 741 + Heat Transfer Film: 2516/10

L' idoneità all'impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretani Decorat System® e film sublimatici Decorat System® dovrà essere valutata sul sito internet www.decorat-system.com (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.