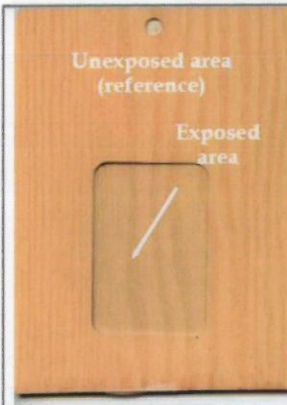
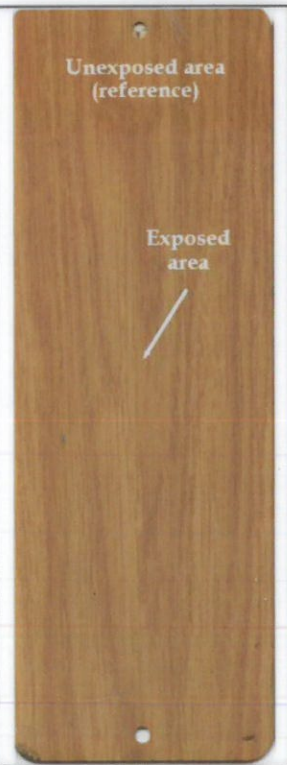



Sandwood


Test Report: Florida Natural Exposure		Decoral LAB Research and Development	98
Florida Test	Total duration: 12 months		
EXPOSURE PERIOD: FROM: 01/05/2021 TO: 01/05/2022			
LAB ID NUMBER: 30670 POWDER COATING: 9G-028-A005 HEAT TRANSFER FILM: 2533/09 colour variation (ΔE): 1,24 residual gloss: 91%			
Technical Remarks Excellent residual gloss and normal colour variation (ΔE)			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye			
Mod_TR_02_rev02 Laboratory Decoral System Date: 20/12/2022 ID Report: TR-NE-98-2022			

Test Report: Accelerated Weathering Test		Decoral LAB Research and Development	28
Laboratory Test	No. 603	Device: QSun 3000N	Total duration: 1157h
			
LAB ID NUMBER: 30664 POWDER COATING: 9G-028-A005 HEAT TRANSFER FILM: 2513/04 colour variation (ΔE): 1,01 residual gloss: 80%			
Technical Remarks Good residual gloss and normal colour variation (ΔE), after 1157 hours.			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.			
Mod_TR_01_rev03 Laboratory Decoral System Date: 09/02/2024 ID Report: TR-IA-28-2024			

Test Report: Florida Natural Exposure		Decoral LAB Research and Development	49
Florida Test	Total duration: 12 months		
EXPOSURE PERIOD: FROM: 19/01/2018 TO: 24/01/2019			
LAB ID NUMBER: 41777 POWDER COATING: D6-07685 HEAT TRANSFER FILM: 2002/01 colour variation (ΔE): 1,01 residual gloss: 90%			
Technical Remarks Excellent residual gloss and normal colour variation (ΔE)			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye			
Mod_TR_02_rev02 Laboratory Decoral System Date: 10/05/2019 ID Report: TR-NE-49-2019			

Test Report: Florida Natural Exposure		Decoral LAB Research and Development	90
Florida Test	Total duration: 12 months		
EXPOSURE PERIOD: FROM: 10/08/2022 TO: 10/08/2023			
LAB ID NUMBER: 53997 POWDER COATING: D6-07685 HEAT TRANSFER FILM: 2507/07 colour variation (ΔE): 1,39 residual gloss: 88%			
Technical Remarks Excellent residual gloss and normal color variation (ΔE)			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye			
Mod_TR_02_rev02 Laboratory Decoral System Date: 08/02/2024 ID Report: TR-NE-90-2024			

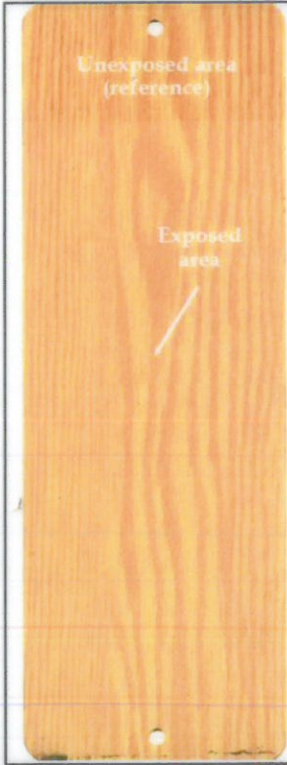
Test Report: Florida Natural Exposure		Decoral LAB Research and Development	98
Florida Test	Total duration: 12 months		
EXPOSURE PERIOD: FROM: 27/04/2019 TO: 07/05/2020			
LAB ID NUMBER: 44345 POWDER COATING: D6 726 HEAT TRANSFER FILM: 2513/13 Colour variation (ΔE): 1,74 residual gloss: 85%			
Technical Remarks Excellent residual gloss and low colour variation (ΔE)			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye			
Mod_TR_02_rev02 Laboratory Decoral System Date: 27/10/2020 ID Report: TR-NE-98-2020			

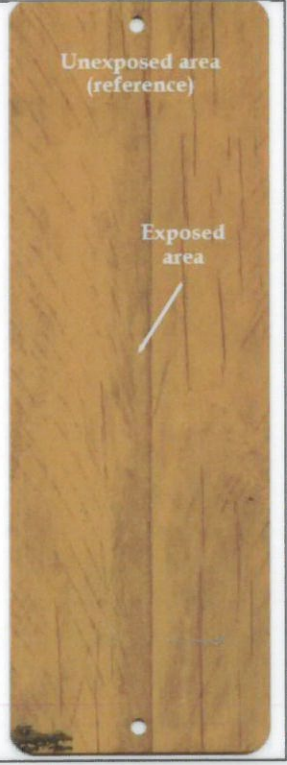Test Report: Florida Natural Exposure		Decoral LAB Research and Development	19
Florida Test	Total duration: 12 months		
EXPOSURE PERIOD: FROM: 10/08/2022 TO: 10/08/2023			
LAB ID NUMBER: 53560 POWDER COATING: D6 726 HEAT TRANSFER FILM: 2120/05 colour variation (ΔE): 1,62 residual gloss: 84%			
Technical Remarks Excellent residual gloss and normal color variation (ΔE)			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye			
Mod_TR_02_rev02 Laboratory Decoral System Date: 19/01/2024 ID Report: TR-NE-19-2024			

Suitability for outdoor use of different combinations between polyurethane Decoral System® Powder coatings and heat transfer film Decoral System® must be assessed on www.decoral-system.com. (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

Sandwood

L'ideoneità all'impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretani Decoral System® e film sublimatici Decoral System® dovrà essere valutata sul sito internet www.decoral-system.com (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.

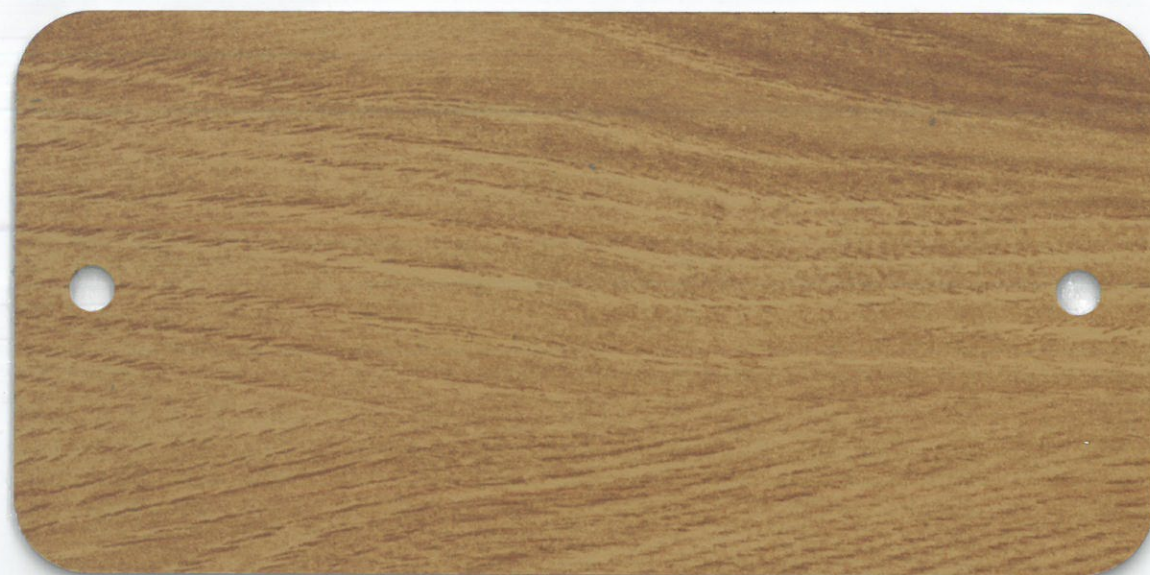

Powder Coating: DS-0768S + Heat Transfer Film: 2002/01



Powder Coating: DS 726 + Heat Transfer Film: 2120/03



Powder Coating: 9G-028-A005 + Heat Transfer Film: 2513/04



Powder Coating: DS 726 + Heat Transfer Film: 2513/13



Powder Coating: DS-0768S + Heat Transfer Film: 2507/07



Powder Coating: 9G-028-A005 + Heat Transfer Film: 2533/09