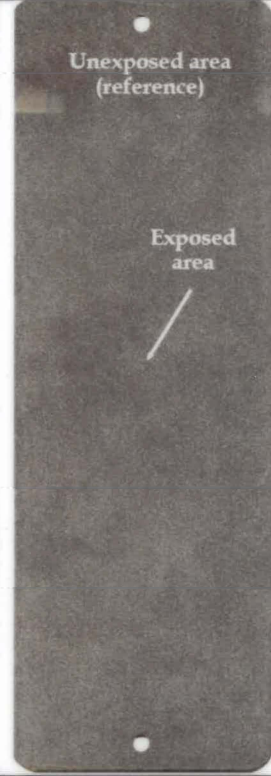
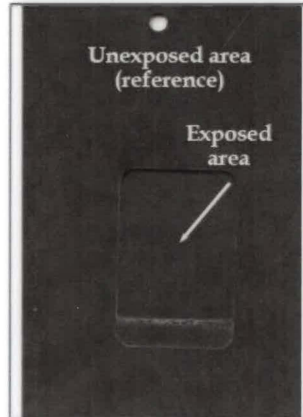
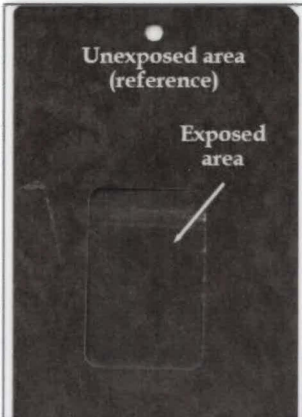
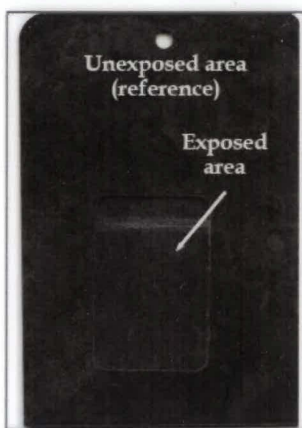



City Asphalt

Test Report: Florida Natural Exposure		Decoral LAB Research and Development		342	
Laboratory Test	No. 680	Device: Sol 3000eN	Total duration: 12 months		
EXPOSURE PERIOD: FROM 10/08/2022 TO 10/08/2023					
LAB ID NUMBER: 50464 POWDER COATING: Micro-1075 HEAT TRANSFER FILM: 6064/02 colour variation (ΔE): 0.89 residual gloss: 91%					
Technical Remarks Excellent residual gloss and low color variation (ΔE)					
Technical Opinion: Suitable for OUTDOOR USE					
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. REQUIREMENTS The residual gloss must be at least 90% of the original gloss. The final evaluation will be based on visual inspection with the naked eye.					
Mod_TR_02_rev02		Laboratory Decoral System		Date: 08/02/2024 ID Report: TR-NE-342-2024	

Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		04	
Laboratory Test	No. 692	Device: Sol 3000eN	Total duration: 1253 h		
EXPOSURE PERIOD: FROM 10/08/2022 TO 10/08/2023					
LAB ID NUMBER: 57218 POWDER COATING: DG-174-A005 HEAT TRANSFER FILM: 6054/01 colour variation (ΔE): 0.24 residual gloss: 85%					
Technical Remarks Good residual gloss and low variation (ΔE), after 1253 hours.		Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03		Laboratory Decoral System		Date: 12/05/2025 ID Report: TR-IA-04-2025	

Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		95	
Laboratory Test	No. 680	Device: Sol 3000eN	Total duration: 1121 h		
EXPOSURE PERIOD: FROM 20/08/2013 TO 21/08/2014					
LAB ID NUMBER: 55008 POWDER COATING: Micro-1075 HEAT TRANSFER FILM: 6054/11 colour variation (ΔE): 0.34 residual gloss: 98%					
Technical Remarks Excellent residual gloss and low variation (ΔE), after 1121 hours.		Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03		Laboratory Decoral System		Date: 12/09/2024 ID Report: TR-IA-95-2024	


Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		98	
Laboratory Test	No. 680	Device: Sol 3000eN	Total duration: 1121 h		
EXPOSURE PERIOD: FROM 10/08/2022 TO 10/08/2023					
LAB ID NUMBER: 55015 POWDER COATING: DG-174-A005 HEAT TRANSFER FILM: 5024/06 colour variation (ΔE): 1.12 residual gloss: 95%					
Technical Remarks Excellent residual gloss and low variation (ΔE), after 1121 hours.		Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03		Laboratory Decoral System		Date: 12/09/2024 ID Report: TR-IA-98-2024	

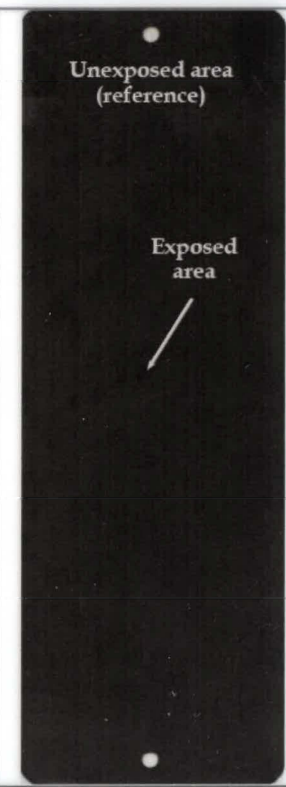Test Report: Florida Natural Exposure		Decoral LAB Research and Development		181	
Laboratory Test	No. 680	Device: Sol 3000eN	Total duration: 12 months		
EXPOSURE PERIOD: FROM 10/08/2022 TO 10/08/2023					
LAB ID NUMBER: 50910 POWDER COATING: DG-075/3 HEAT TRANSFER FILM: 4052/01 colour variation (ΔE): 0.34 residual gloss: 77%					
Technical Remarks Good residual gloss and low color variation (ΔE)		Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye.					
Mod_TR_02_rev02		Laboratory Decoral System		Date: 09/02/2024 ID Report: TR-NE-181-2024	


Test Report: Florida Natural Exposure		Decoral LAB Research and Development		182	
Laboratory Test	No. 680	Device: Sol 3000eN	Total duration: 12 months		
EXPOSURE PERIOD: FROM 20/08/2013 TO 21/08/2014					
LAB ID NUMBER: 52049 POWDER COATING: Micro-1075 HEAT TRANSFER FILM: 5024/02 colour variation (ΔE): 1.63 residual gloss: 109%					
Technical Remarks Excellent residual gloss and low color variation (ΔE).		Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye.					
Mod_TR_02_rev02		Laboratory Decoral System		Date: 21/11/2014 ID Report: TR-NE-182-2014	

Suitability for outdoor use of different combinations between polyurethane Decorall System® Powder coatings and heat transfer film Decorall System® must be assessed on www.decorall-system.com. (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

City Asphalt

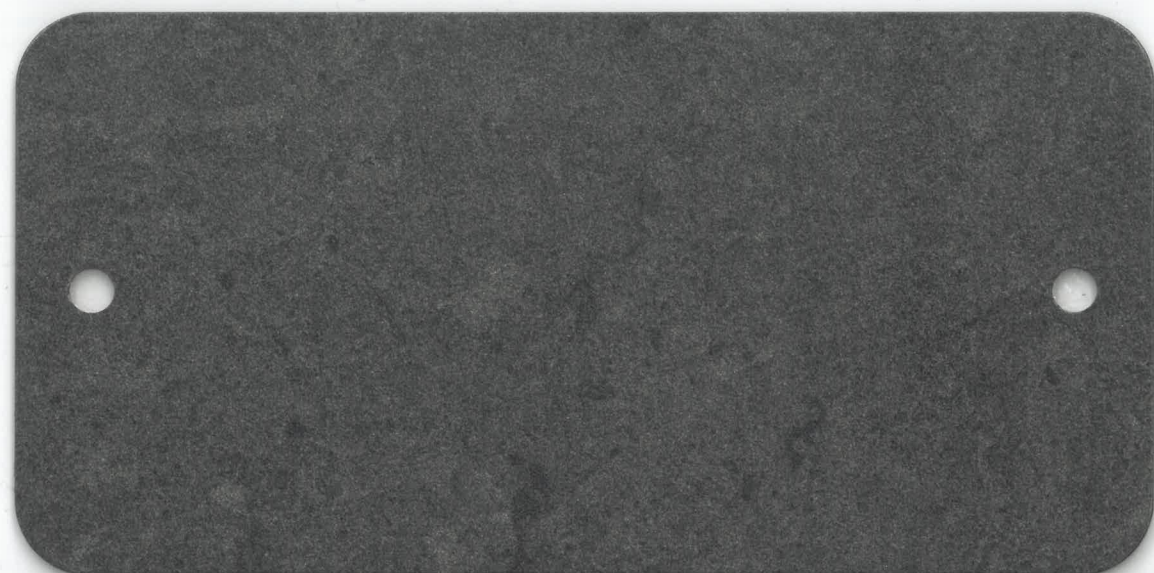

Powder Coating: Mirror-107S + Heat Transfer Film: 5026/02

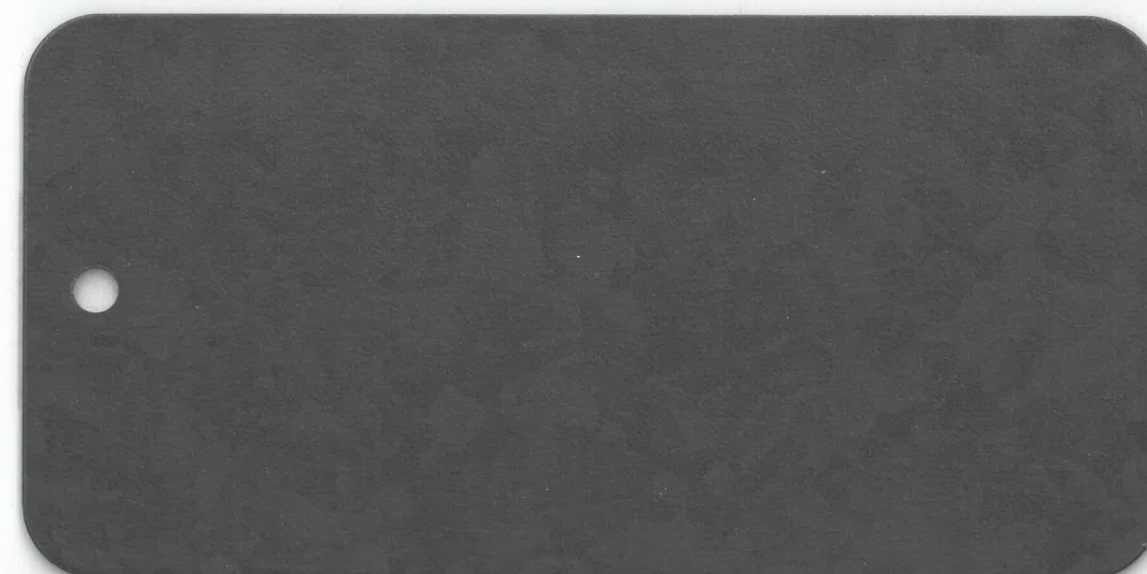

Powder Coating: 9G-174-A005 + Heat Transfer Film: 6054/01



Powder Coating: Mirror-107S + Heat Transfer Film: 6064/02



Powder Coating: 9G-174-A005 + Heat Transfer Film: 5024/08



Powder Coating: Mirror-107S + Heat Transfer Film: 6054/11



Powder Coating: DS-0757S + Heat Transfer Film: 6052/01

L' idoneità all'impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretani Decorall System® e film sublimatici Decorall System® dovrà essere valutata sul sito internet www.decorall-system.com (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.